

HVC-1.5N3S

Voltage detector for DC substation

DC 1500V

音響
発光

防滴



HVC-1.5N3S

The plate is attached to grounding clip
Inspection before use



It can be grounded in various place;etc cubicle
Please use two clips at the same time.

Voltage detector for DC 1500V substation



■ Accessory

Bag for housing

■ Option



HVC-1.5N3S
Grounding magnet
(UH20004)




HVC-1.5N3S
Grounding clip
(UH20003)



HVC-1.5N3S
The plate is attached to
grounding clip
Inspection before use
(DH18007)

■ Dimensions

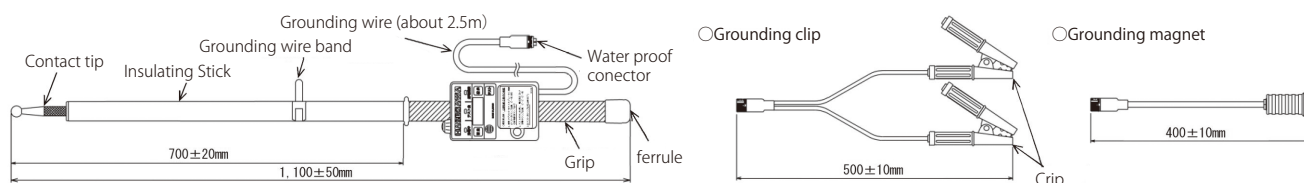

HVC-1.5N3M

Voltage detector for monorail

DC 600~1500V

音響
発光

防滴

Voltage detector for monorail



■ Accessory

Bag for housing

■ Option



HVC-1.5N3M
Grounding magnet
(UH20004)




HVC-1.5N3M
Grounding clip
(UH20003)



HVC-1.5N3M
The plate is attached to
grounding clip
Inspection before use
(DH18007)

■ Dimensions

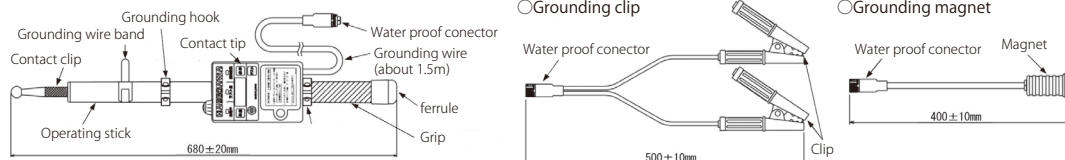

■ Specifications

Model	HVC-1.5N3S	HVC-1.5N3M
Working voltage	DC1500V	DC600V/750V/1,500V
	Max DC2,000V (in contact with bare wire) *Voltage detection of negative potential is not possible.	
Operation strating voltage (Voltage to ground)	DC750V±50V	DC300V±20V
Insulation resistance	contact tip-grounding clip 10MΩ±10%(with 1,000Vmega measuring instrument)	
Dielectric strength	contact tip-grounding magnet AC4,000V,1 min	
Leakage current	1 mA or less at dielectric strenght test	
Operating temperature range	0°C~+50°C	
Volume adjustment for buzzer sound	Sound volume at a distance of 1m	
	High:75dB Miidium:60dB or more 75dB or less Low:60dB or less	
Output voltage at test	DC1,000V±200V	DC500V±100V
Battery	R6 or LR6(1.5V) x 4 pcs	
Structure	Dustproof,Waterproof(Equivalent toIP44)	
Weight	About 1.8kg(with grounding clip)	About 1.6kg(with grounding clip)