

Grounding hook


Type HF

Universal type for cubicle.

Type HF

Adjustable head hardware angle

30 degrees to the bottom and 90 degrees to the top of the operating rod.

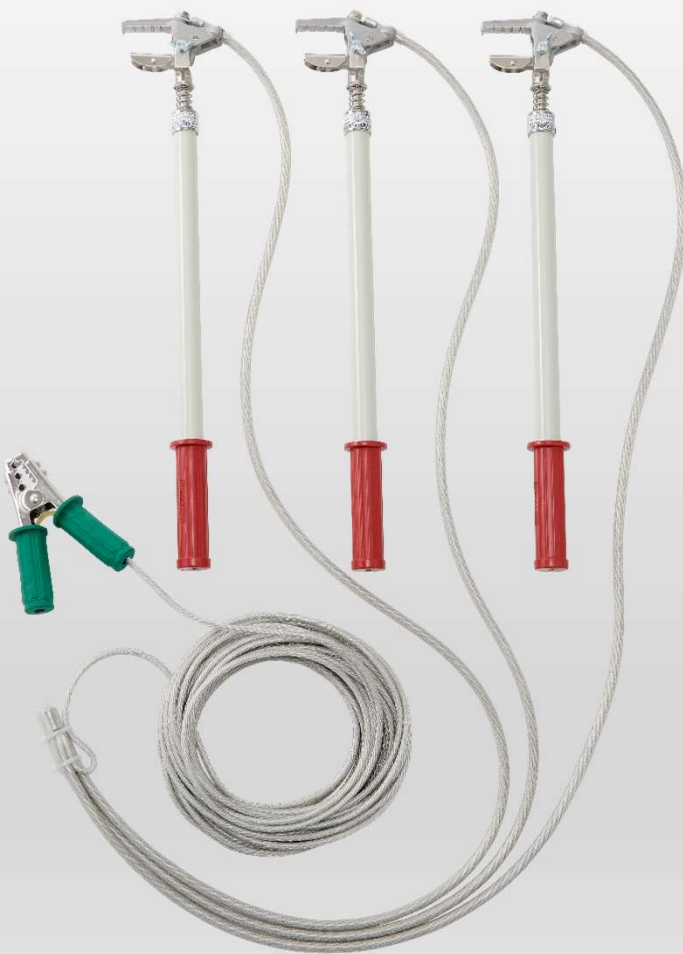


* Accessory



■ Specifications

Model	Head Gold	Length of insulating stick	Grounding wire	Grounding metal fitting	Hammer-in type grounding bar	Weight
HF	Wide angle adjustment type	Φ26 × 338mm	22mmφ × 1.5m × 3 wires 8mmφ × 1.5m × 1 wire	Clip	Φ10 Shillelagh	3.4kg

■ Dimensions

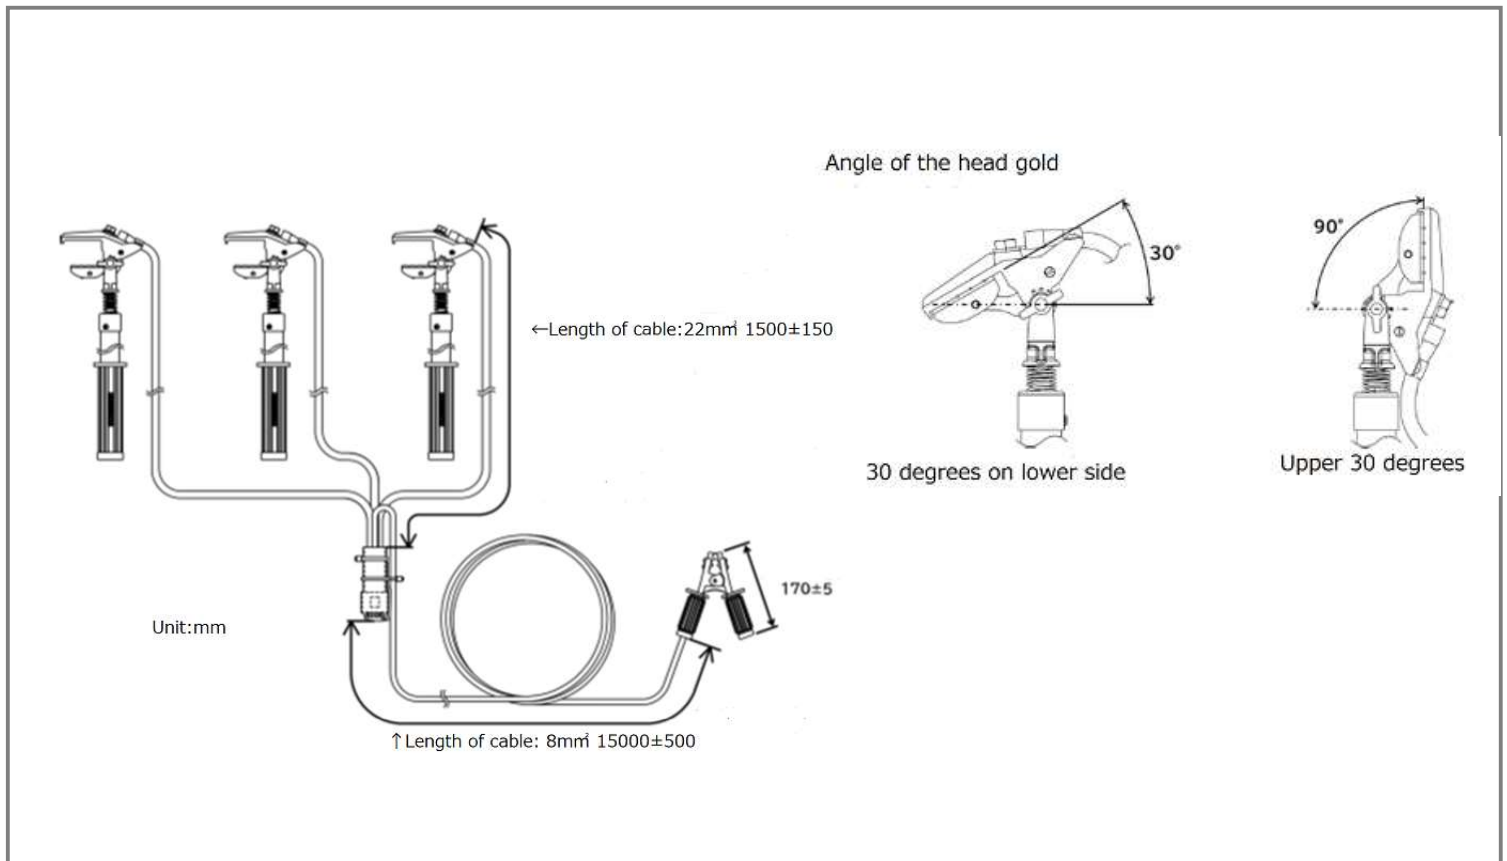

■ How to use

Before connect the grounding device, Detect the voltage by the Voltage detector and turn off the Circuit Breaker switch & disconnector switch.


And confirm that both of power is off by using the Voltage detector.

[Step1]

- Visual check of grounding hook set.
- Appearance and construction check.



[Step2]

- Connect the grounding device to earth terminal.



[Step3]

- Connect the contact clamp to Line 1, 2 and 3. * Connect all 3 lines



HASEGAWA ELECTRIC CO., LTD

<http://www.hasegawa-elec.co.jp> infor@hasegawa-elec.co.jp